

FIG. 2

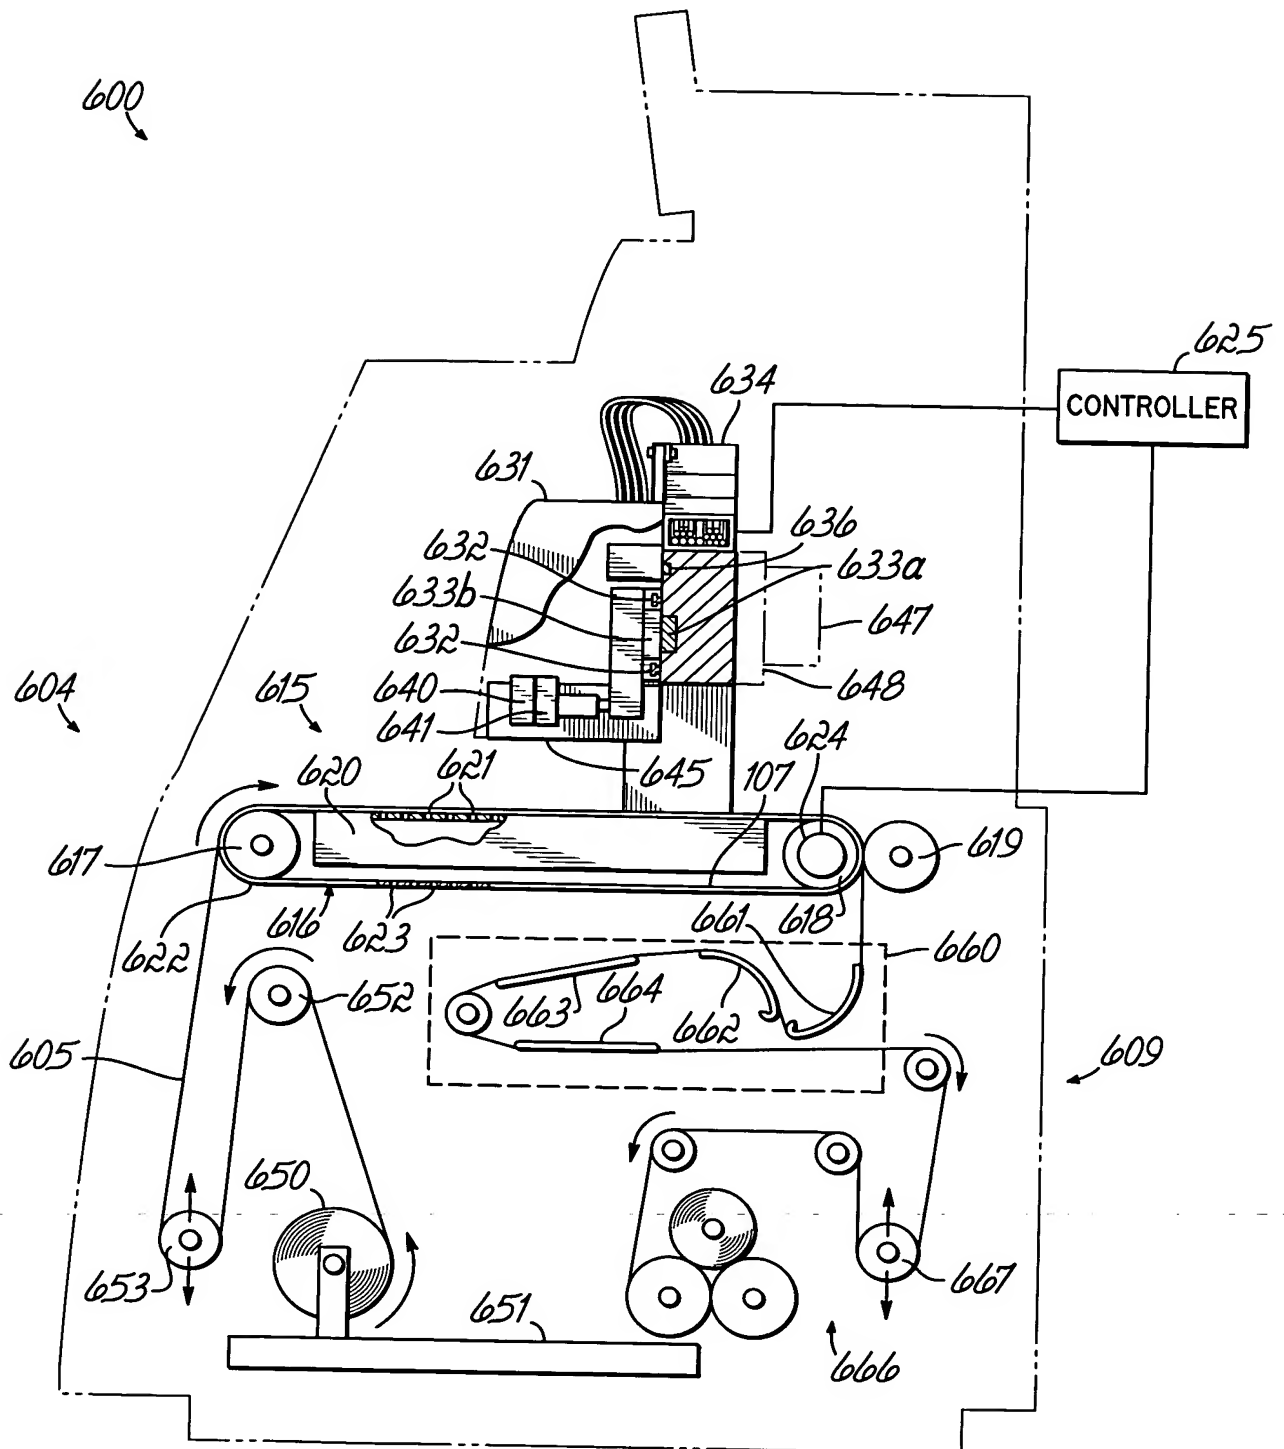


FIG. 3



FIG. 4

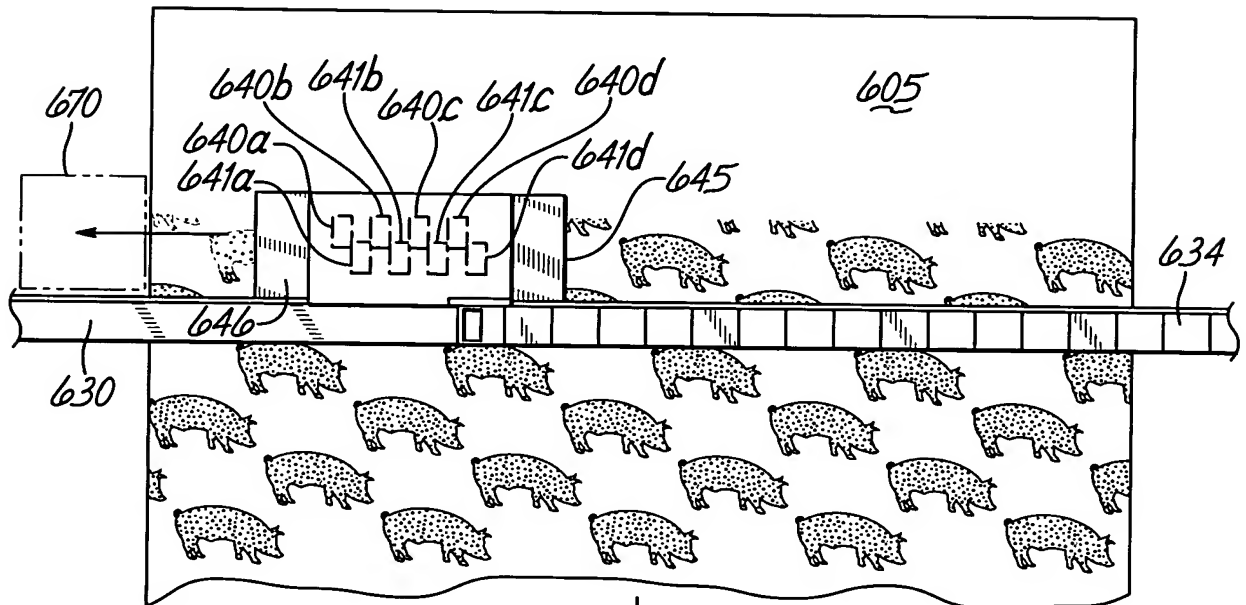


FIG. 5

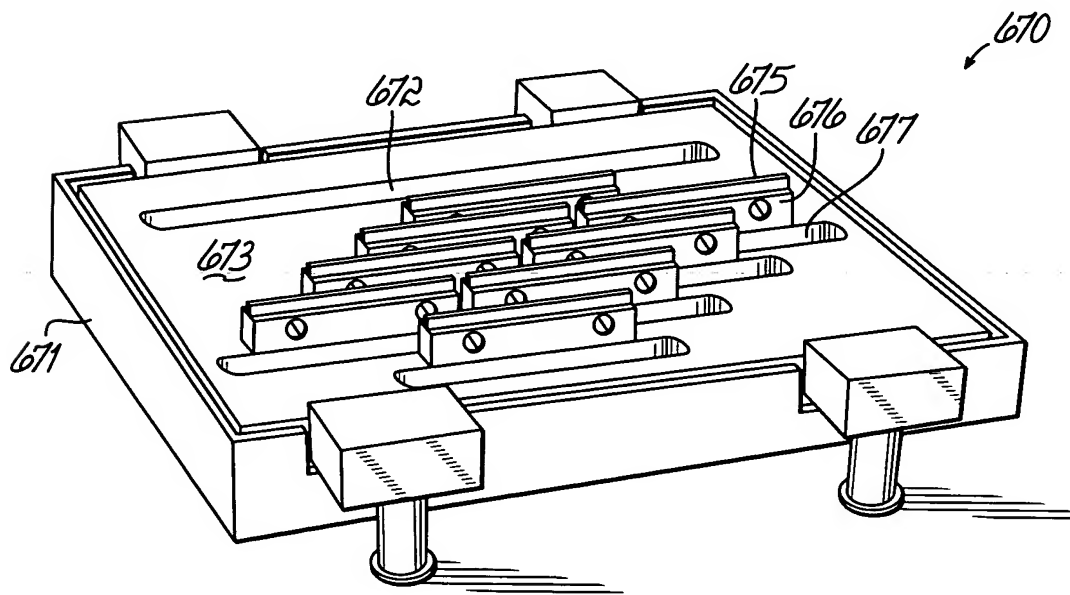


FIG. 5A

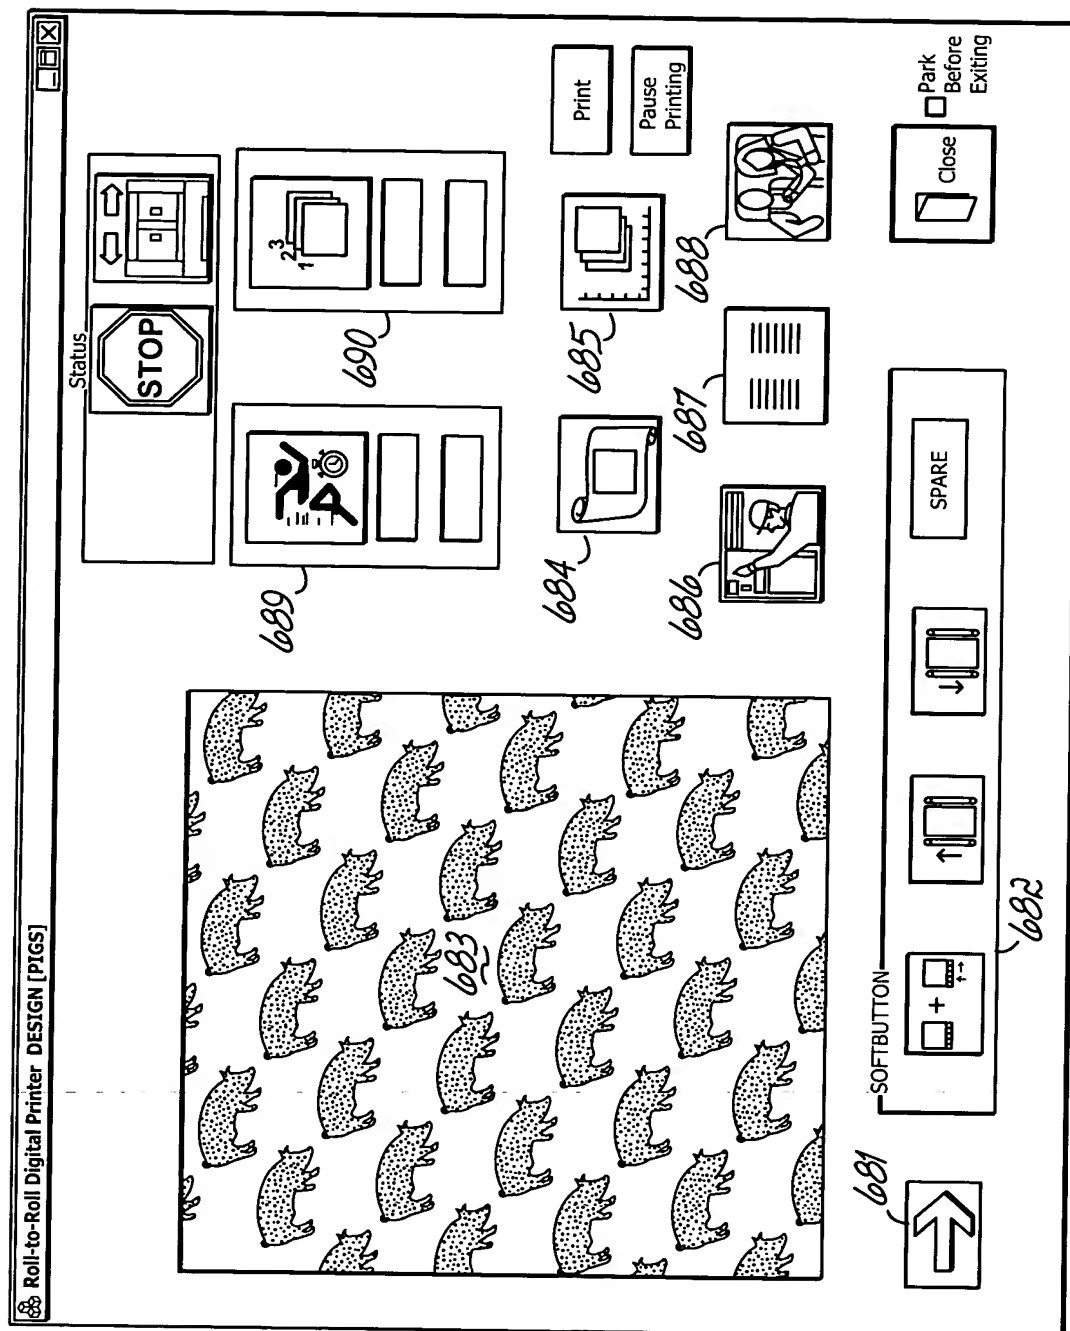


FIG. 6

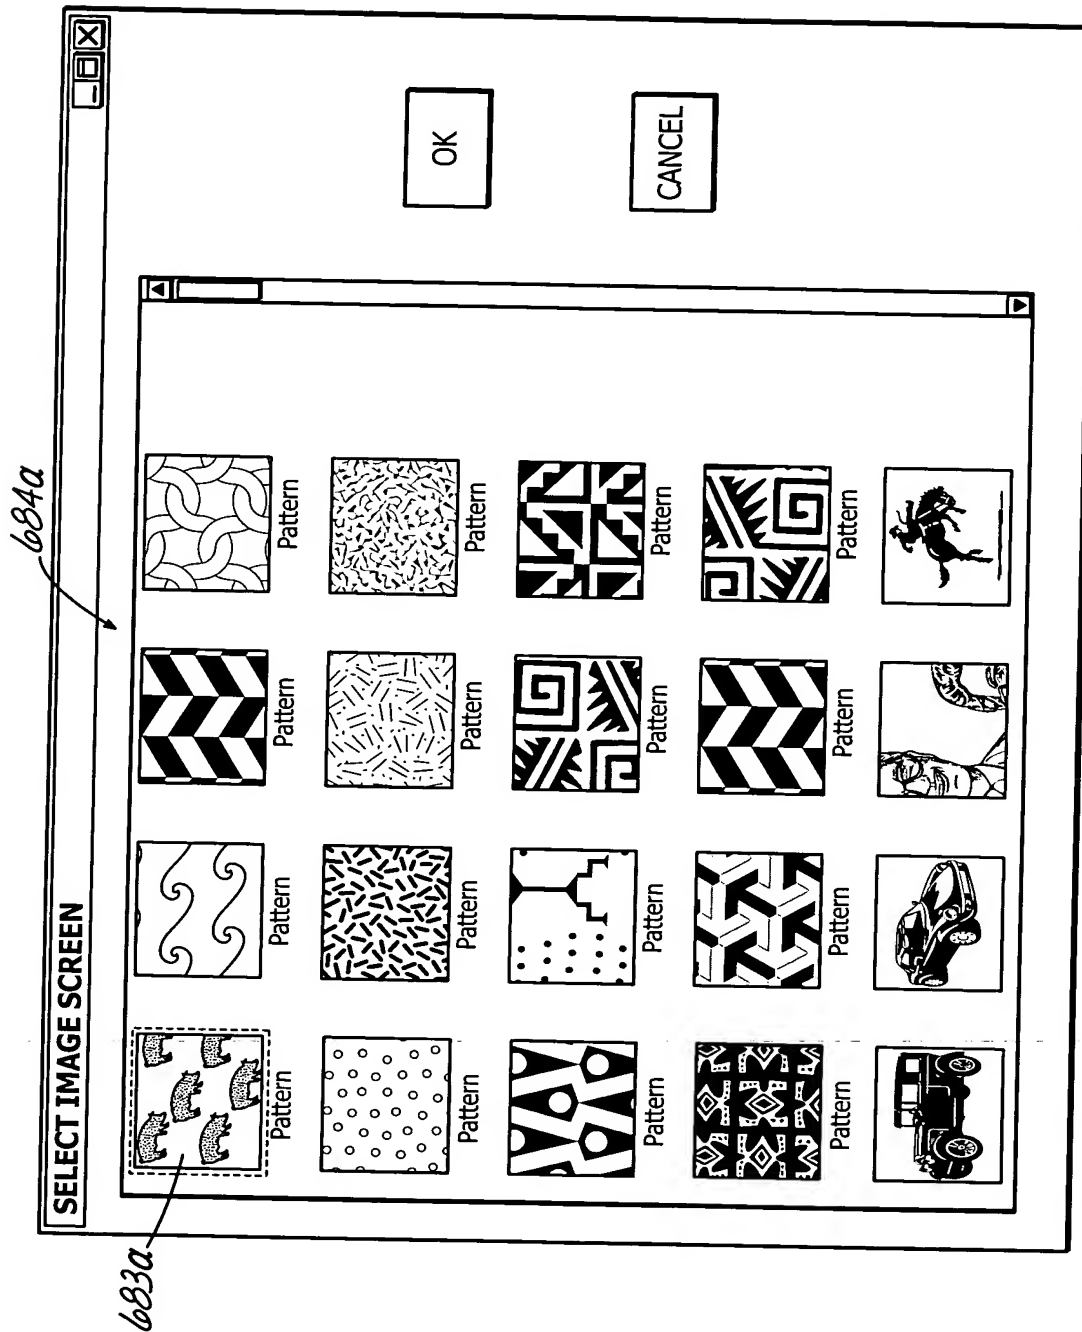


FIG. 6A

685a

684a 686a

Printer Configuration

General | Head Parameters | Head Cleaning | Motion Control | Manual Motion Control | Remote Control

Color	Temp.	Ink	thread	Purge/Pump
Cyan 1	N/A	N/A	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Magenta 1	N/A	N/A	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Yellow 1	N/A	N/A	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Black 1	N/A	N/A	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Cyan 2	N/A	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Magenta 2	N/A	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Yellow 2	N/A	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Black 2	N/A	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>

Mensicus: Hold Release

Pump (to selected heads): Start Stop

Purge (selected heads): Start Stop

Wipe (No Servo Motion)

Carriage: Home Park

Raise Lower

☐ Analog Ink Levels

Reset Watchdog

Reset After: 4 s

Ok Cancel Apply Help

FIG. 6C

7

686b

Printer Configuration

General Head Parameters Head Cleaning Motion Control Manual Motion Control Remote Control

Common

Frequency Advance - Full: 79.5 mm Pump Timeout 150 s Reset After: 600 s
 10 kHz Frac: 0.4 mm Heater Timeout 150 s Reset After: 300 s
 Head Elevation: 3.8 mm Carriage Overtravel - Left: 20 mm Right: 20 mm

Print

Black 2

Temp [°C] 49 -- 50
 Ink [V] 3.2 -- 3.6
 Offset 8.43 in. 0 μs
 Fire Pulse 2.2 V 8.25 μs

Yellow 2

Temp [°C] 49 -- 50
 Ink [V] 3.2 -- 3.6
 Offset 5.62 in. 0 μs
 Fire Pulse 2.2 V 8.25 μs

Magenta 2

Temp [°C] 49 -- 50
 Ink [V] 3.2 -- 3.6
 Offset 0 in. 0 μs
 Fire Pulse 2.2 V 8.25 μs

Cyan 2

Temp [°C] 49 -- 50
 Ink [V] 3.2 -- 3.6
 Offset 0 in. 0 μs
 Fire Pulse 2.2 V 8.25 μs

Black 1

Temp [°C] 49 -- 50
 Ink [V] 3.2 -- 3.6
 Offset 8.43 in. 0 μs
 Fire Pulse 2.2 V 8.25 μs

Yellow 1

Temp [°C] 49 -- 50
 Ink [V] 3.2 -- 3.6
 Offset 5.62 in. 0 μs
 Fire Pulse 2.2 V 8.25 μs

Magenta 1

Temp [°C] 49 -- 50
 Ink [V] 3.2 -- 3.6
 Offset 2.8 in. 0 μs
 Fire Pulse 2.2 V 8.25 μs

Cyan 1

Temp [°C] 49 -- 50
 Ink [V] 3.2 -- 3.6
 Offset 0 in. 0 μs
 Fire Pulse 2.2 V 8.25 μs

Ok Cancel Apply Help

FIG. 6D

L

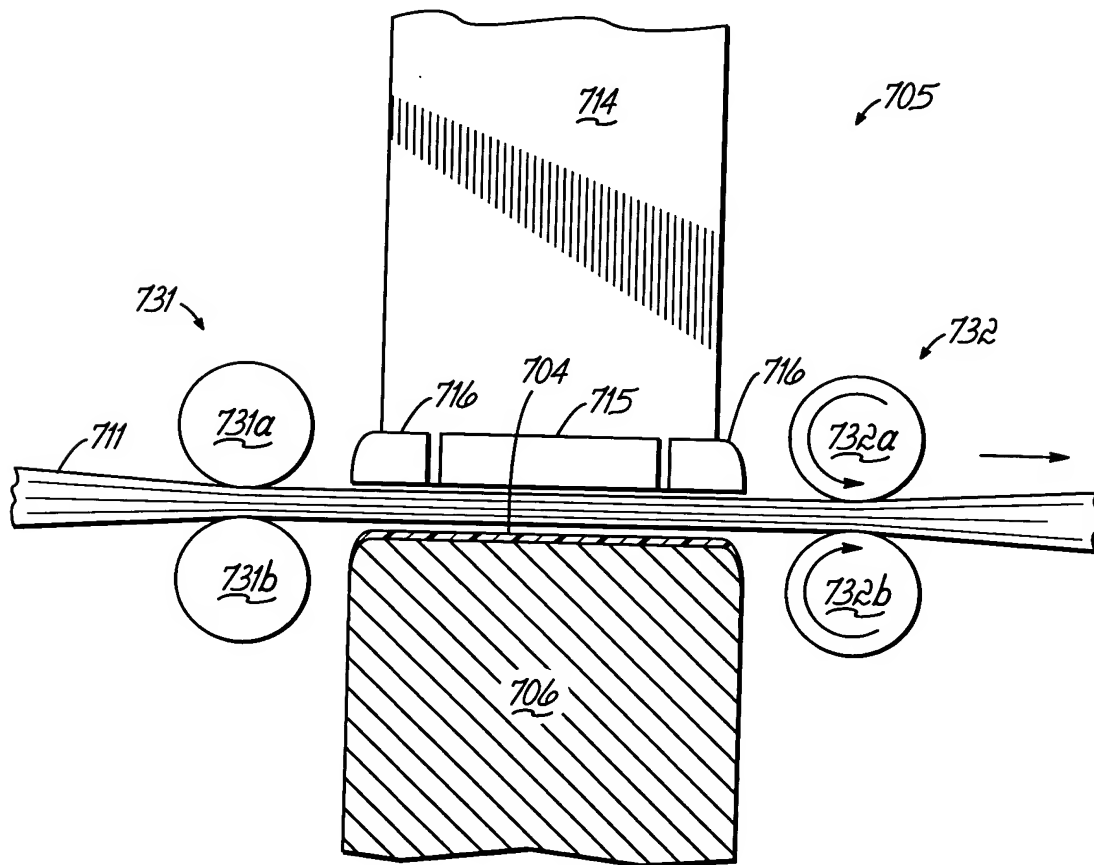


FIG. 7C

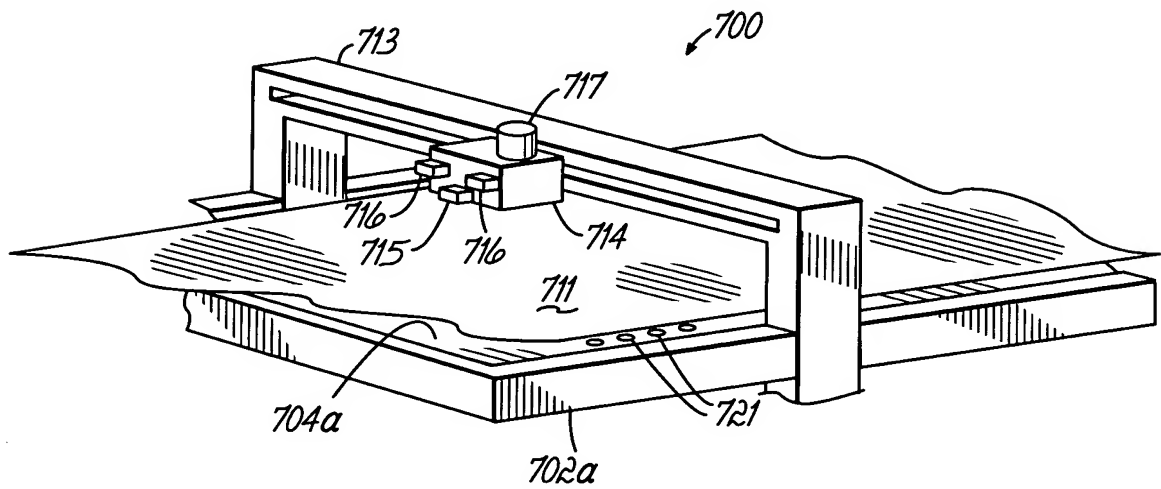


FIG. 7A

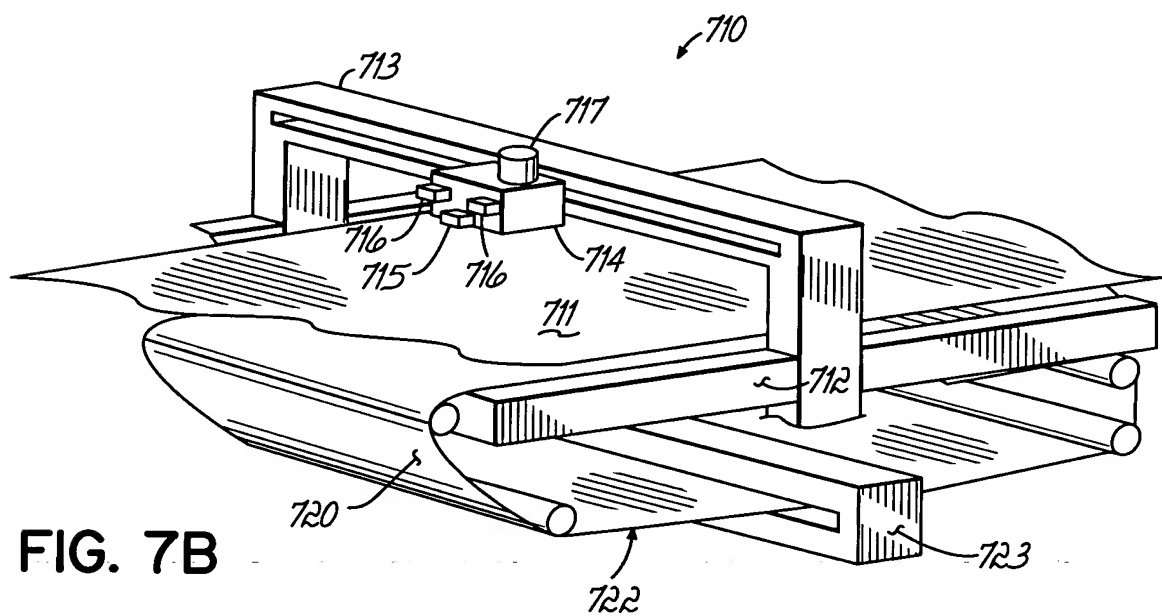


FIG. 7B